



Instantaneous Reference Frame Realization by Means of Combination of Space Geodesy Techniques Onboard JASON-2 Satellite

Drazen Svehla, Claudia Flohrer, Michiel Otten, Tim Springer, Rene Zandbergen, John Dow

European Space Agency
ESA/ESOC

European Geosciences Union – General Assembly 2010
Vienna, 04 May 2010

European Space Agency

Introduction



What is Instantaneous Reference Frame?

- Reference frame realized by epoch-wise solution of GPS orbits and clocks
- Typically realized by 7-8 GPS satellites in the field of view of a ground station or a LEO satellite
- Errors in the GPS orbits and clocks directly map into gravity field estimation (GOCE), radio-occultation, altimetry, PPP, etc...
- Can we use LEO GPS data to improve Instantaneous Reference Frame in the re-processing?

European Space Agency

Introduction

Why JASON-2?



- JASON-2 is like an orbiting stations connecting all GPS satellites in only 90 min – **de-correlation of all global parameters**
- Compared to CHAMP and GRACE, the JASON-2 orbit is less sensitive to J_2 and other low degree harmonics of the Earth's gravity field
- Number of orbit parameters similar to GPS satellites
- The only satellite with all three techniques: **GPS, SLR, DORIS**
- No significant near-field multipath (compared to JASON-1)
- JASON-2 has the most accurate LEO orbits


European Space Agency

JASON-2: Daily RMS of orbit differences

ESOC: GPS+DORIS+SLR



Can 5-mm in the radial component improve global GPS parameters?

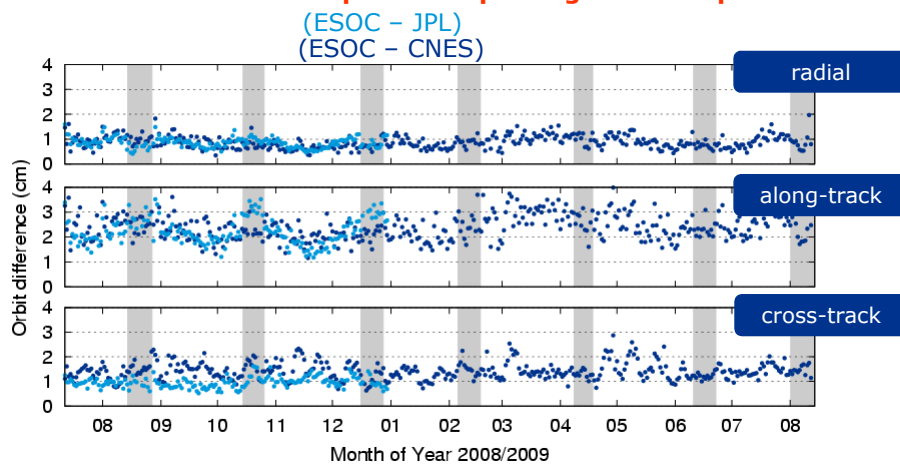

Re-Processing of all JASON-1&2 orbits at ESOC, for more see (Flohrer et al. 2010)

European Space Agency

Combination Strategy

JASON-2 + GPS Constellation



Time Period:

- CONT08 10.8.-31.8.2008

Software:

NAPEOS 3.5

GPS Satellites:

- IGS-like scenario – daily solutions

JASON-2:

- GPS+DORIS+SLR measurements
- absolute PCVs for GPS antenna from Robot Calibration


Datum Definition:

- ITRF2005
- Scale defined mainly by SLR (high constraints)
- NNR Condition for GPS and DORIS Stations

European Space Agency

JASON-2 Orbit

Impact of the global network on JASON-2 POD

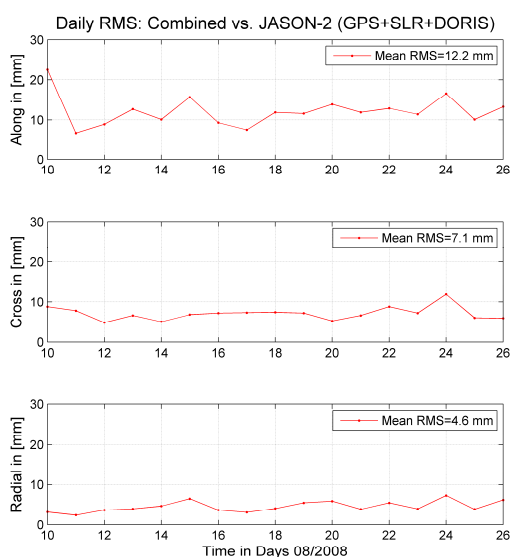


Main effect in the along-track

5-mm RMS in radial

European Space Agency

JASON-2 Orbit

Combined solution with fixed and float ambiguities

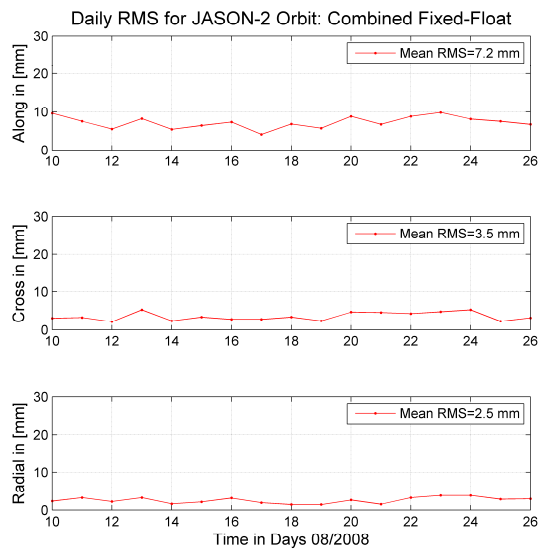

Main effect in the along-track


JASON-2 has similar effect as ambiguity resolution in the global network de-correlates parameters

2.5-mm RMS in radial

European Space Agency

GPS Orbits

Combined solution with fixed and float ambiguities

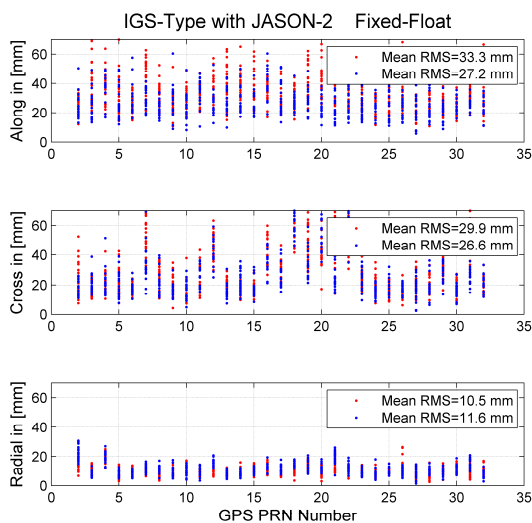


6 mm in along-track

JASON-2 has similar effect as ambiguity resolution in the global network – decorrelates parameters

European Space Agency

Impact on GPS Orbits

Daily Solutions

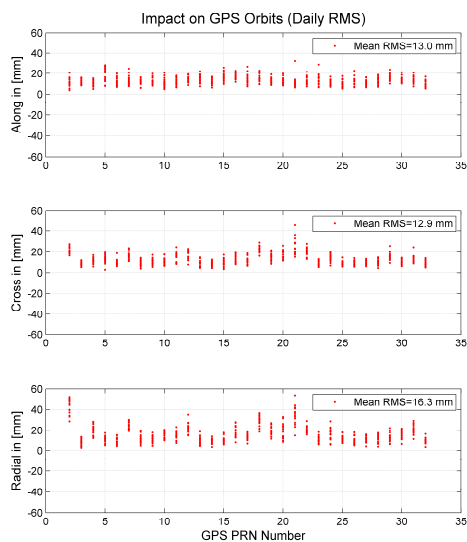


13-16 mm in all components!!!

European Space Agency

Impact on GPS Orbits

Daily Solutions

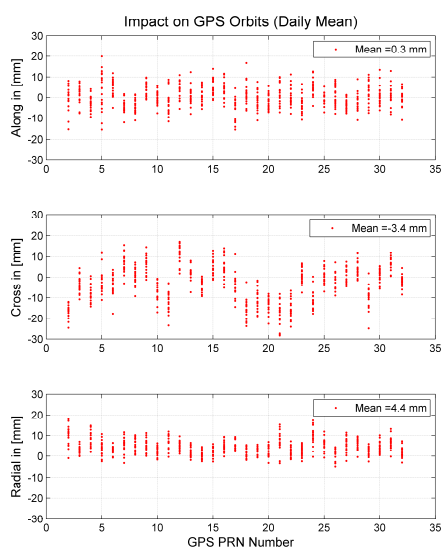

Small biases in Radial and Cross-track

European Space Agency

Helmert Transformation

Weekly Solutions: Station Coordinates



Week 1

dx = -0.83 mm
dy = -0.94 mm
dz = -5.90 mm

rx = 0.021 mas
ry = 0.052 mas
rz = -0.051 mas

scale = 0.13 ppb

Week 2

dx = -1.78 mm
dy = -1.67 mm
dz = -5.75 mm

rx = 0.067 mas
ry = 0.055 mas
rz = -0.077 mas

scale = 0.14 ppb

Week 3

dx = -1.72 mm
dy = -1.22 mm
dz = -5.60 mm

rx = 0.059 mas
ry = -0.011 mas
rz = -0.051 mas


scale = 0.16 ppb

5-6 mm bias in z-geocenter

European Space Agency


Helmert Transformation: Geocenter and Scale

Daily Solutions: GPS Orbits

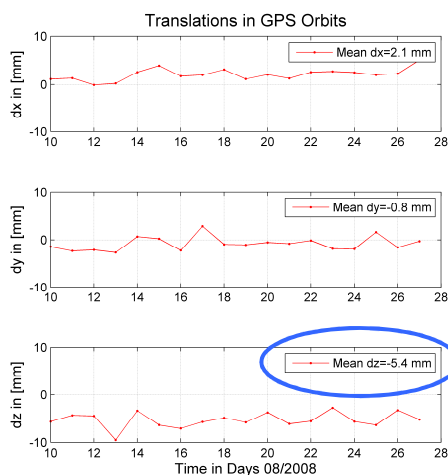


JASON-2 is reducing the SLR bias in GPS orbits!

5 mm bias in z-geocenter and scale

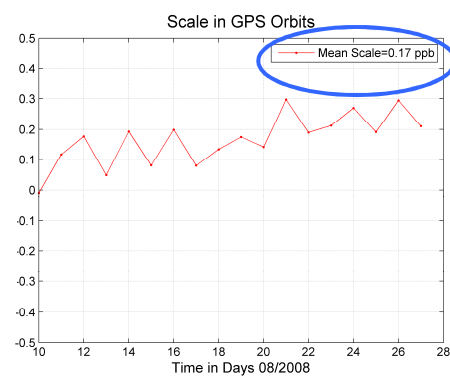

Helmert Transformation

Daily Solutions: GPS Orbits

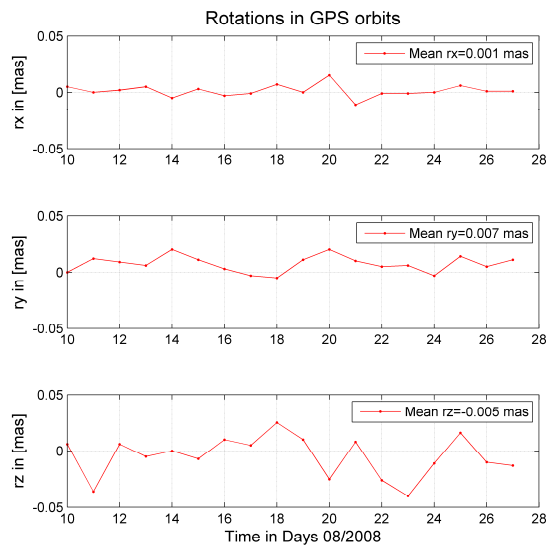


JASON-2 does not see any rotations in GPS orbits

European Space Agency


Polar Motion

Daily Solutions

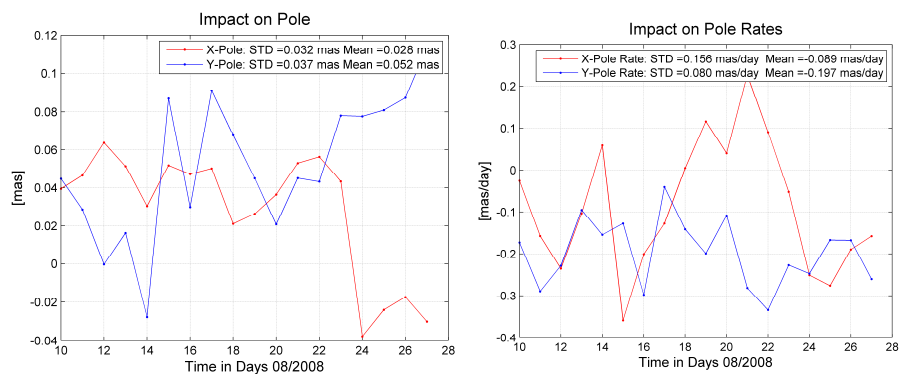

European Space Agency

Length of Day Combined Solutions

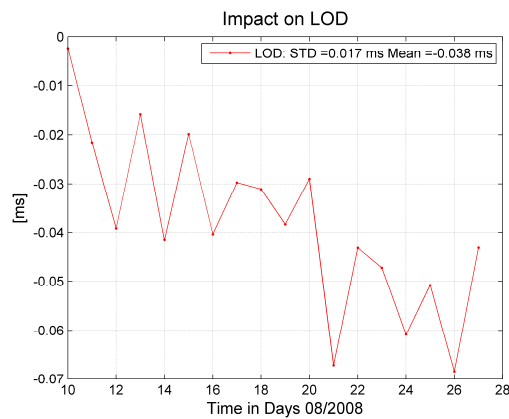

First results in stacking of combined NEQs to be improved.

European Space Agency

Conclusions



- Is an ideal LEO satellite for the Combination. Compared to CHAMP and GRACE, the JASON-2 orbit is less sensitive to J_2 and other low degree harmonics of the Earth's gravity field.
- Adding JASON-2 data has similar effect as ambiguity resolution in the global network. Fast changing geometry de-correlates the system.
- Constant 5-mm bias in the z-geocenter and scale.
- The 5-mm bias in z-geocenter most likely driven by SLR.
- JASON-2 is reducing the SLR bias in GPS orbits by 5-mm!

European Space Agency